

Z PSF STEELOX ★★☆☆

POLIFAN flap disc with aggressive stock removal rate and long tool life.

Advantages:

- Fast work progress and high economic efficiency thanks to the aggressive stock removal rate.
- Long tool life.
- Also suitable for low-power angle grinders.

Materials that can be worked:

steel, stainless steel (INOX)


Applications:

surface grinding, weld dressing, chamfering, deburring

Abrasive:

Zirconia alumina Z

PFERDVALUE:

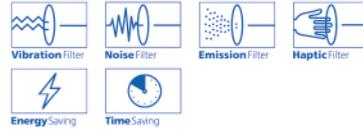

D [mm]	Grite Size	Art-No	H [mm]	Max. RPM		Description
Flat type PFF						
150	40	73001350	22.23	10,200	10	POLIFAN PFF 100 Z40 PSF STEELOX

A-COOL PSF ALU

D [mm]	Grite Size	EAN Nr. Box	H [mm]	Max. RPM		Description
Flat type PFF						
100	40	6972478351202	16.0	15,300	10	POLIFAN PFF 100 A-COOL 40 PSF ALU
125	40	6972478350229	22.23	12,200	10	POLIFAN PFF 125 A-COOL 40 PSF ALU
180	40	6972478350236	22.23	8,500	10	POLIFAN PFF 180 A-COOL 40 PSF ALU

